

## ESD Protection Diode

## Features

- 300 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu s$ )  
Replacement for MLV (0805)
- Unidirectional & Bidirectional Configurations
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 3.3V, 5V, 12V, 15V and 24V,36V
- Low Leakage Current
- Response Time is Typically  $< 1$  ns
- AEC-Q101 qualified (Automotive grade with suffix "Q".)
- Exsemi technology



## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 30$ kV (air),  $\pm 30$ kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 24A (8/20 $\mu s$ )


## Mechanical Characteristics

- JEDEC SOD-323 package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS/WEEE Compliant

## Applications

- Laptop Computers
- Cellular Phones
- Digital Cameras
- Personal Digital Assistants (PDAs)

## Schematic &amp; PIN Configuration

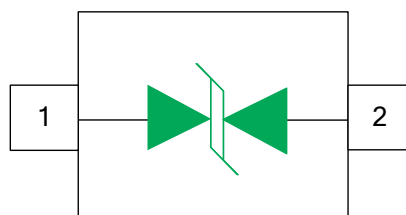


Bidirectional

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Unidirectional Peak Pulse Power ( $t_p = 8/20\mu s$ ) -See Figure 1	$P_{PP}$	300	Watts
Bidirectional Peak Pulse Power ( $t_p = 8/20\mu s$ ) -See Figure 1	$P_{pp}$	300	Watts
Operating Temperature	$T_J$	-55 to + 150	$^{\circ}C$
Storage Temperature	$T_{STG}$	-55 to +150	$^{\circ}C$

Electrical Parameters (T=25°C)

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

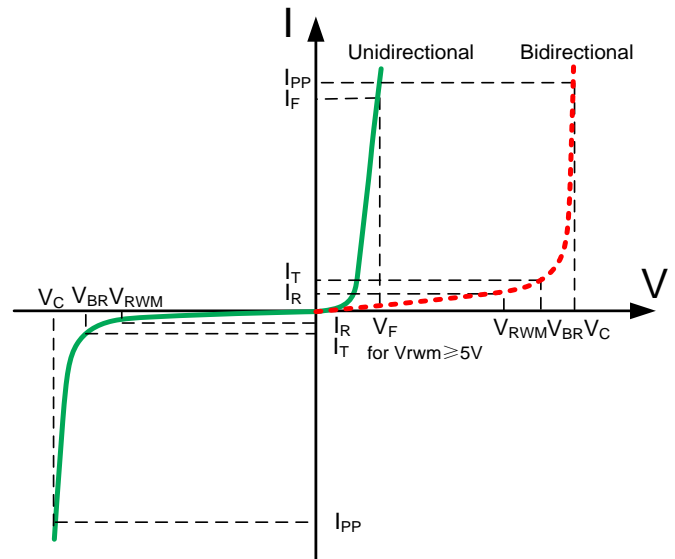

Electrical Characteristics

Part Number	Reverse Stand off Voltage $V_{RWM}$ (Volts)	Minimum Breakdown Voltage $V_{BR}@1mA$ (Volts)	Maximum Clamping Voltage $V_C @I_{PP}$ (Volts)	Maximum Peak Pulse Current $I_{pp}$ (Amps)	Maximum Reverse Leakage Current $I_R@V_{RWM}$ ( $\mu A$ )	Typical Capacitance DC=0V CJ@ 1 MHz (pF)
EPD03C	3.3	4.0	12.5	24	70	300
EPD05C	05	6.0	14	21	1	200
EPD12C	12	13.3	25	12	1	200
EPD15C	15	16.7	30	10	1	150
EPD24C	24	26.7	45	9	1	30
EPD36C	36	40	72	4.16	1	20

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

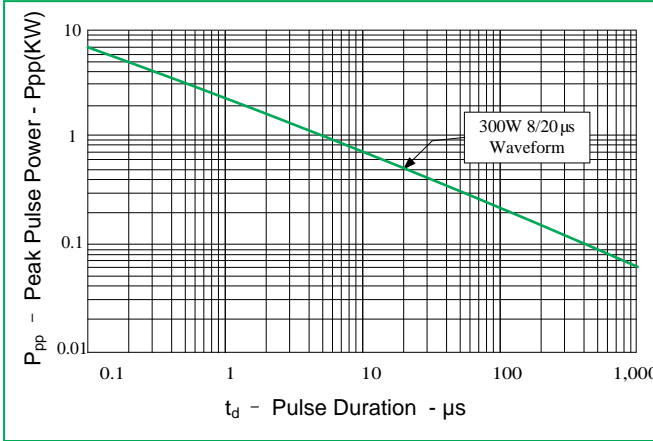


Figure 2: Power Derating Curve

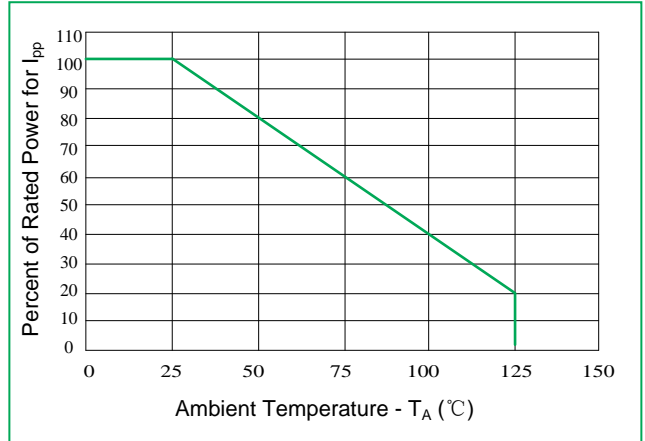


Figure 3: Pulse Waveform

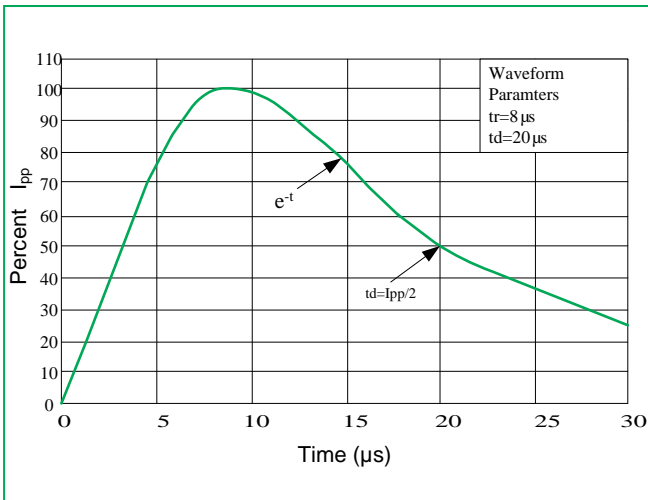


Figure 4: Clamping Voltage vs. Peak Pulse Current



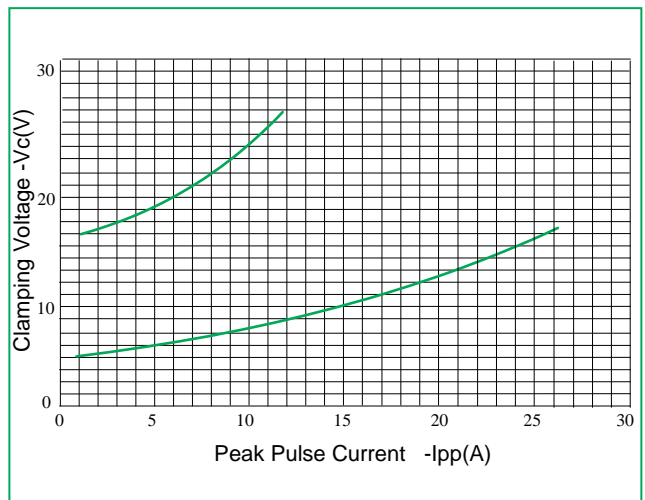


Figure 5: Normalized Junction capacitance vs. Reverse Voltage

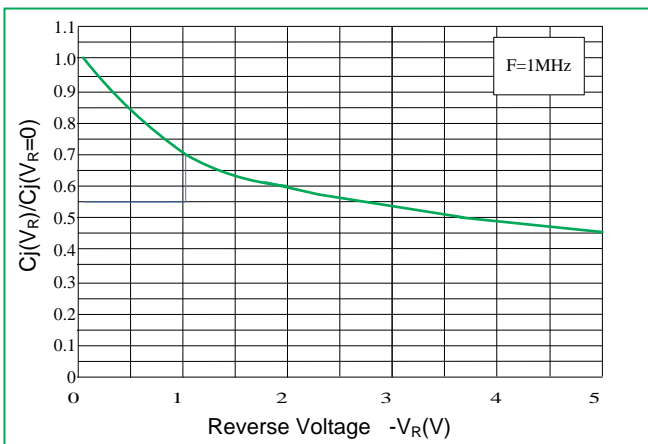

## Outline Drawing SOD-323

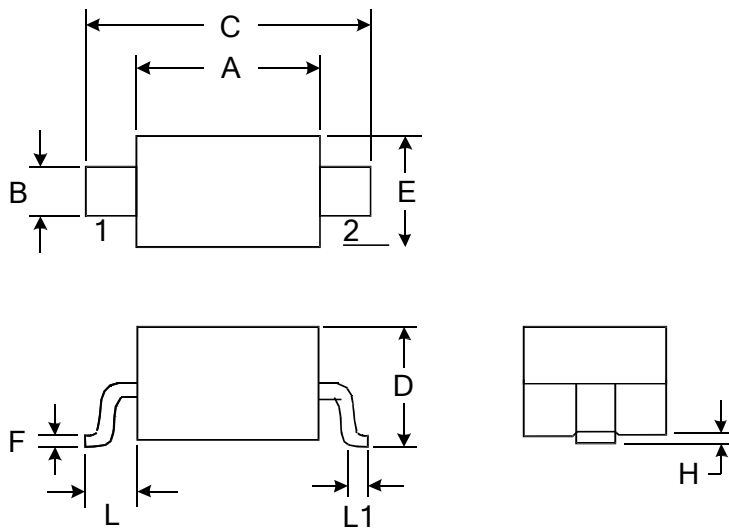

DIMENSIONS				
SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	0.250	0.350	0.010	0.014
C	2.500	2.700	0.098	0.106
D		1.150		0.043
E	1.200	1.400	0.047	0.055
F	0.080	0.150	0.003	0.006
L	0.475 REF		0.019REF	
L1	0.250	0.400	0.010	0.016
H	0.000	0.100	0.000	0.004

## Marking

Part Number	Marking
EPD03C	33/03B
EPD05C	05/05B
EPD08C	08/08B
EPD12C	12/12B
EPD15C	15/15B
EPD24C	24/24B
EPD36C	36/36B

## Ordering information

Order code	Package	Base qty	Delivery mode
EPDXXC	SOD-323	3000	Tape and reel