



## EP10150T SCHOTTKY RECTIFIER

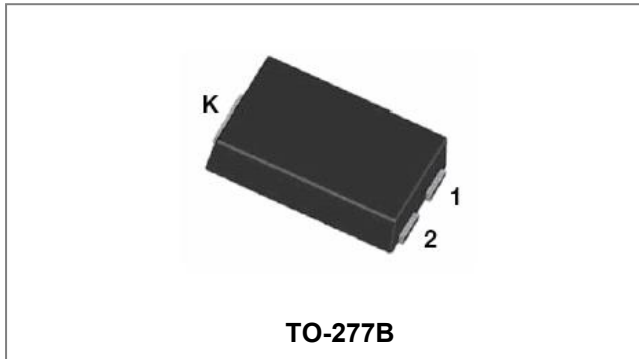

### Features

- 175°C T<sub>J</sub> operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Exsemi technology
- AEC-Q101 qualified (Automotive grade with suffix "Q".)

### Circuit Diagram



### Applications

- Switching power supply
- Converters
- Free-Wheeling diodes
- Reverse battery protection

### Maximum Ratings:

Characteristics	Symbol	Condition	Max.	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	-	150	V
Average Rectified Forward Current	I <sub>F(AV)</sub>	-	10	A
Peak One Cycle Non-Repetitive Surge Current	I <sub>FSM</sub>	8.3ms, Half Sine pulse, T <sub>J</sub> = 25 °C	250	A

### Electrical Characteristics:

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	V <sub>F1</sub>	@ 10A, Pulse, T <sub>J</sub> = 25 °C	-	0.86	V
	V <sub>F2</sub>	@ 10A, Pulse, T <sub>J</sub> = 125 °C	-	0.75	V
Reverse Current*	I <sub>R1</sub>	@V <sub>R</sub> = rated V <sub>R</sub> T <sub>J</sub> = 25 °C	1	5	uA
Reverse Current*	I <sub>R2</sub>	@V <sub>R</sub> = rated V <sub>R</sub> T <sub>J</sub> = 125 °C	-	10	mA

\* Pulse width < 300 μs, duty cycle < 2%

**Thermal-Mechanical Specifications:**

Characteristics	Symbol	Condition	Specification	Units
Junction Temperature	$T_J$	-	-55 to +175	$^{\circ}\text{C}$
Storage Temperature	$T_{\text{stg}}$	-	-55 to +175	$^{\circ}\text{C}$
Typical Thermal Resistance Junction to Ambient (NOTE1)	$R_{\theta JA}$	DC operation	50	$^{\circ}\text{C}/\text{W}$
Typical Thermal Resistance Junction to Lead (NOTE1)	$R_{\theta JL}$	DC operation	8	$^{\circ}\text{C}/\text{W}$
Approximate Weight	wt	-	0.08	g

**NOTE: 1.** Units mounted on P.C.B., 0.5 x 0.5" (30 x 30mm) copper pads.

**Ratings and Characteristics Curves**

FIG.1 FORWARD CURRENT DERATING CURVE

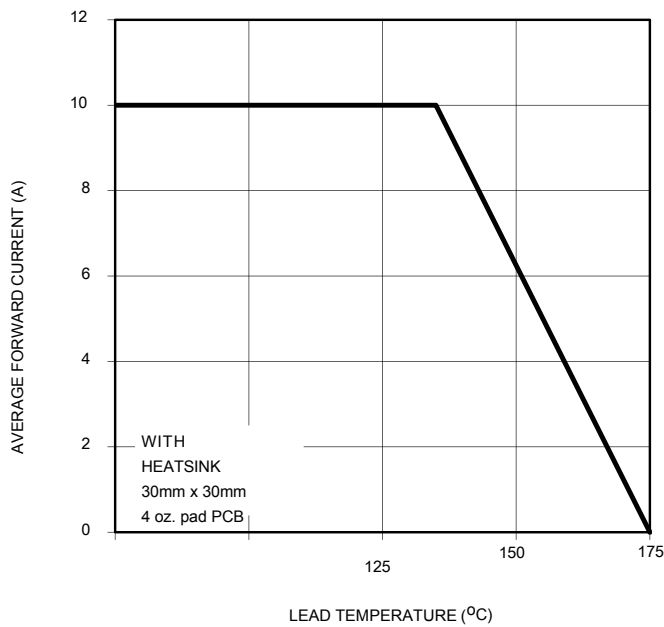


FIG.2 TYPICAL FORWARD CHARACTERISTICS

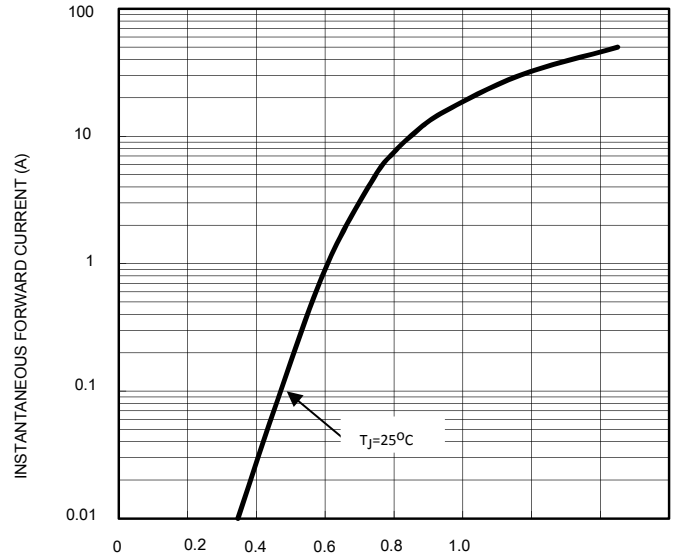


FIG. 3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



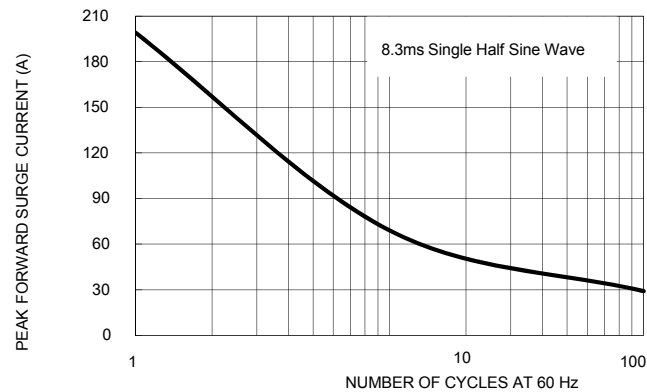


FIG.4 TYPICAL REVERSE CHARACTERISTICS

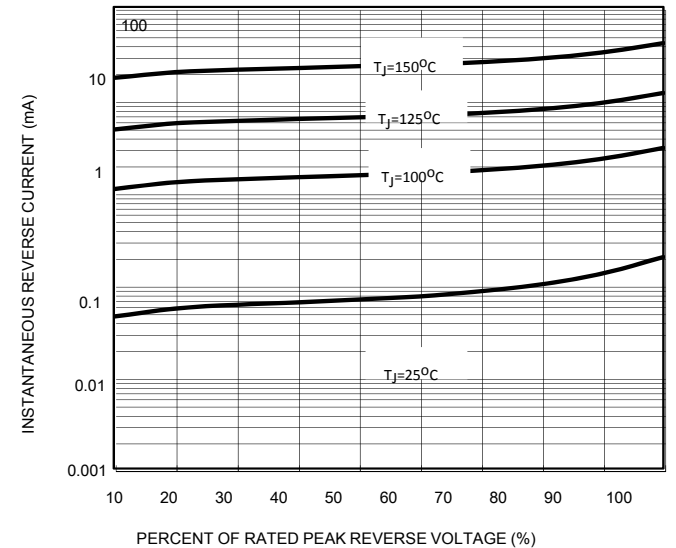


**Mechanical Dimensions TO-277B**

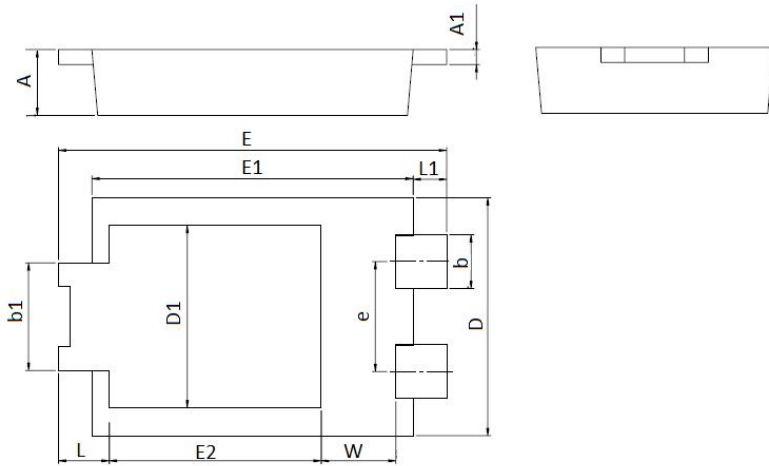

SYMBOL	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.25	0.035	0.049
A1	0.20	0.35	0.008	0.014
b	0.85	0.95	0.033	0.037
b1	1.70	1.90	0.067	0.075
D	3.80	4.30	0.150	0.170
D1	2.90	3.40	0.114	0.134
e	1.50	2.10	0.059	0.076
E	6.30	6.70	0.248	0.264
E1	5.28	5.78	0.208	0.227
E2	3.20	3.90	0.126	0.154
L	0.50	1.10	0.020	0.043
L1	0.41	1.00	0.016	0.039
W	1.10	1.40	0.043	0.055


**TO-277B Suggested Pad Layout**

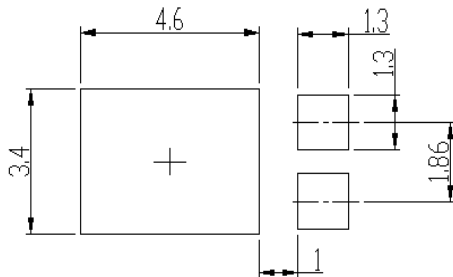

**Note:**

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

**Carrier Tape Specification TO-277B**

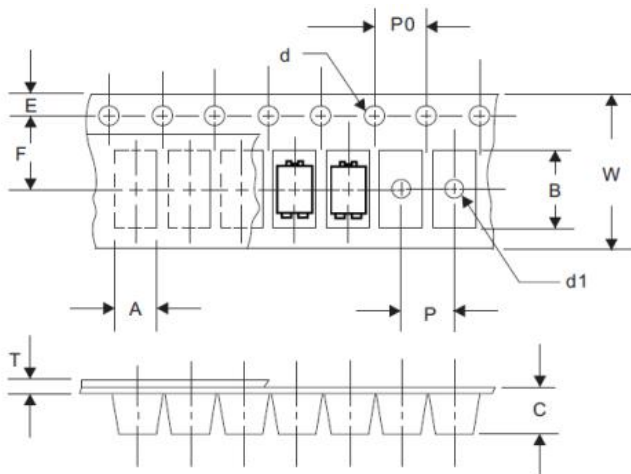

SYMBOL	Millimeters	
	Min.	Max.
A	4.28	4.48
B	6.80	7.10
C	1.30	1.50
d	1.40	1.60
d1	-	1.50
E	1.65	1.85
F	5.40	5.60
P	7.90	8.10
P0	3.90	4.10
T	0.24	0.44
W	11.70	12.30

**Ordering Information**

Device	Package	Shipping
EP10150T	TO-277B(Pb-Free)	5000pcs/ reel