


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE 20 TO 200 Volt CURRENT 2 Ampere

FEATURES

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- AEC-Q101 qualified (Automotive grade with suffix "Q".)
- Exsemi technology

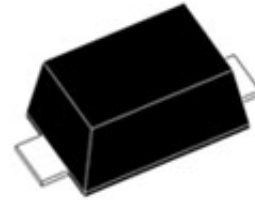

MECHANICAL DATA

- Case: JEDEC SOD-123FL molded plastic body
- Terminals : Solderable per MIL-STD-750, Method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any

Absolute Maximum Ratings and Electrical characteristics

ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, Ratings at 25 °C

for capacitive load, derate by 20 %

Parameter	Symbols	SSD22	SSD24	SSD26	SSD28	SSD210	SSD215	SSD220	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	150	200	V
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	2.0							A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50							A
Max Instantaneous Forward Voltage at 2 A	V_F	0.55	0.65	0.85	0.95	V			
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$	I_R	10	1400	0.5	1200	uA			
Typical Junction Capacitance ⁽¹⁾	C_j	220	180						pF
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	85							°C/W
Operating Junction Temperature Range	T_j	-55~+150			-55~+175				°C
Storage Temperature Range	T_{stg}	-55~+150			-55~+175				°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

RATING AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

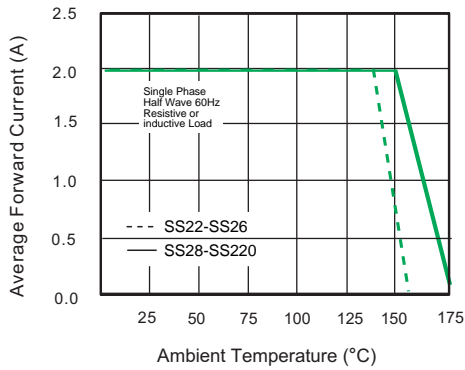


Fig.2 Typical Reverse Characteristics

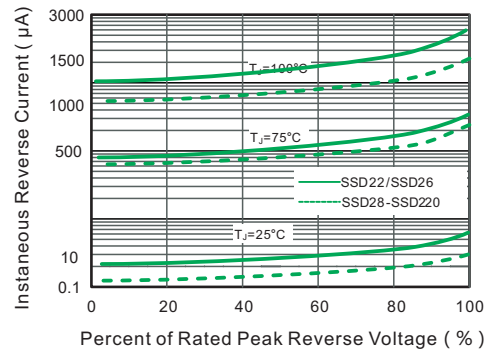


Fig.3 Typical Forward Characteristic

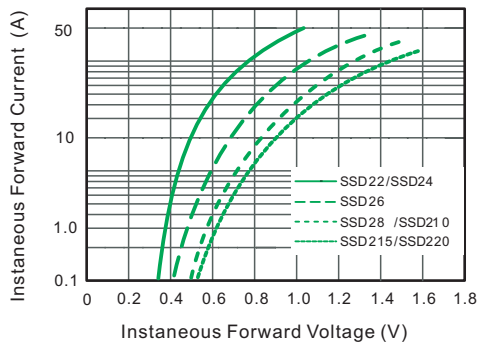


Fig.4 Typical Junction Capacitance

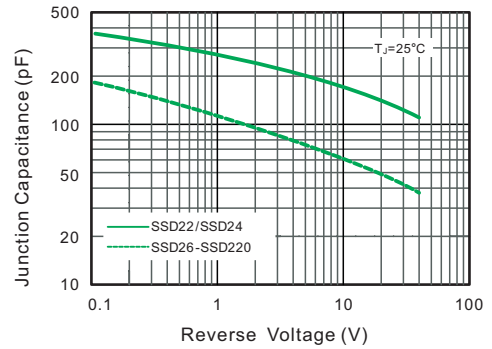


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



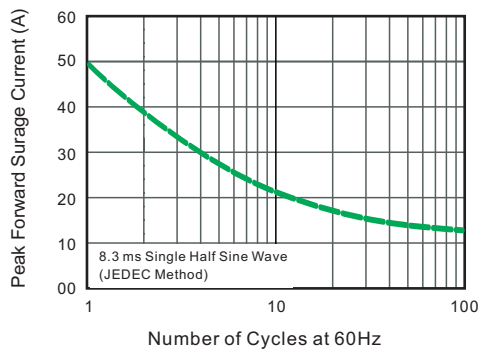


Fig.6- Typical Transient Thermal Impedance

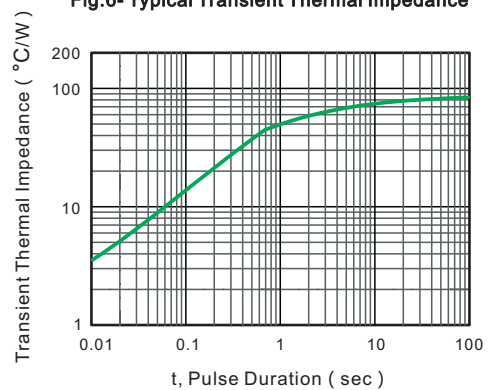

Dimensions

SOD-123FL Package

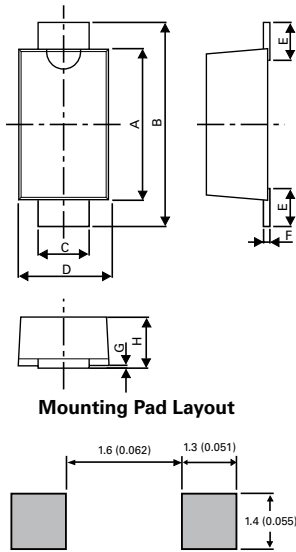


Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A	2.50	3.20	0.0984	0.1259
B	3.40	3.90	0.1339	0.1535
C	0.70	1.35	0.0275	0.0531
D	1.50	2.00	0.0591	0.0787
E	0.35	0.90	0.0138	0.0354
F	0.05	0.26	0.0020	0.0102
G	0.00	0.10	0.000	0.0039
H	0.70	1.35	0.0275	0.0531

Packaging Options

Part number	Component Package	Quantity	Packaging Option	Packaging Specification
SSD2XX	SOD-123FL	3000	Tape & Reel – 8mm tape/7" reel	EIA RS-481

Tape and Reel Specification

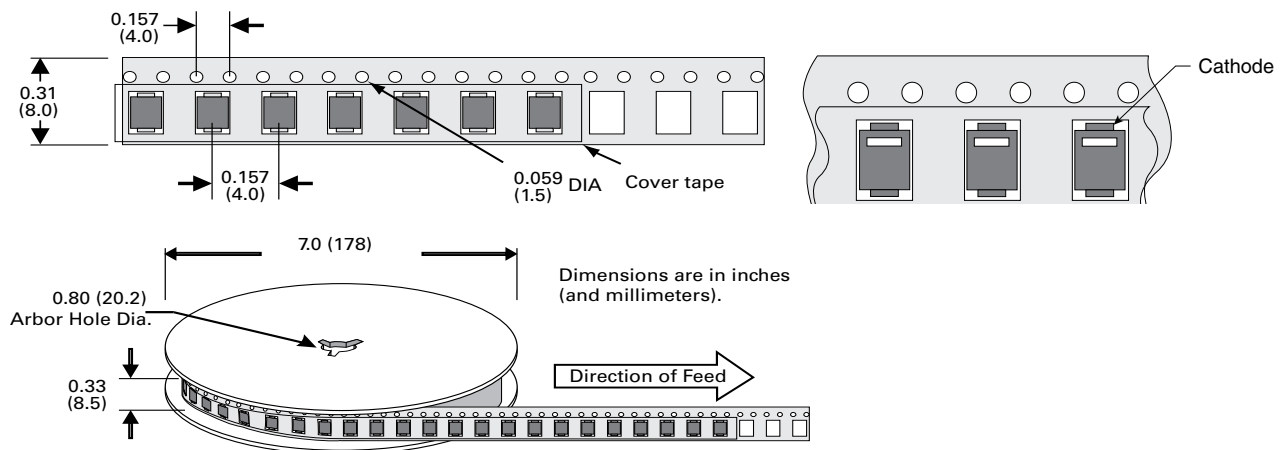

Note: Devices are packed in accordance with EIA standard RS-481-A and specification given above.