

SURFACE MOUNT SUPERFAST RECOVERY RECTIFIERS

Reverse Voltage – 50 to 600 Volts

Forward Current – 2.0 Ampere

Features

- Glass passivated junction chip
- For surface mounted application
- Low profile package
- Built-in strain relief
- Ideal for automated placement
- Easy pick and place
- Superfast recovery time for high efficiency
- Glass passivated chip junction
- High temperature soldering:
260°C/10 seconds at terminals
- Plastic material used carries Underwriters
- Laboratory Classification 94V-0
- AEC-Q101 qualified (Automotive grade with suffix "Q".)



Mechanical Data

- Cases: Molded plastic
- Terminals: Pure tin plated, lead free.
- Polarity: Indicated by cathode band
- Packing: 12mm tape per EIA STD RS-481

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	ES 2A	ES 2B	ES 2C	ES 2D	ES 2F	ES 2G	ES 2H	ES 2J	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	2.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50								A
Maximum Instantaneous Forward Voltage @ 2.0A	V_F	0.95			1.3		1.7			V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	5 350								uA uA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	35								nS
Typical Junction Capacitance (Note 2)	C_j	25			20					pF
Maximum Thermal Resistance (Note 3)	$R_{\theta JA}$	75								°C /W
Operating Temperature Range	T_j	-55 to +150								°C
Storage Temperature Range	T_{STG}	-55 to +150								°C

- Notes:
1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$
 2. Measured at 1 MHz and Applied $V_R=4.0$ Volts
 3. Units Mounted on P.C.B. 0.4" x 0.4" (10mm x 10mm) Pad Areas

RATING AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

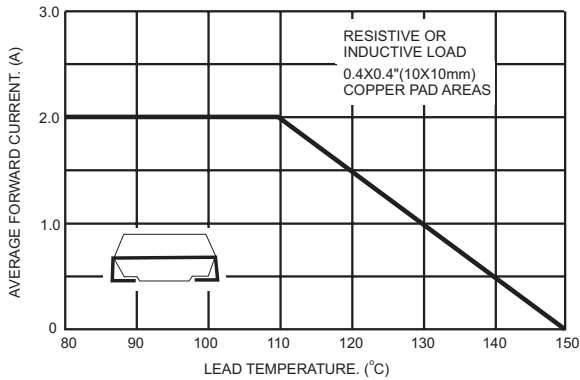


FIG.3- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

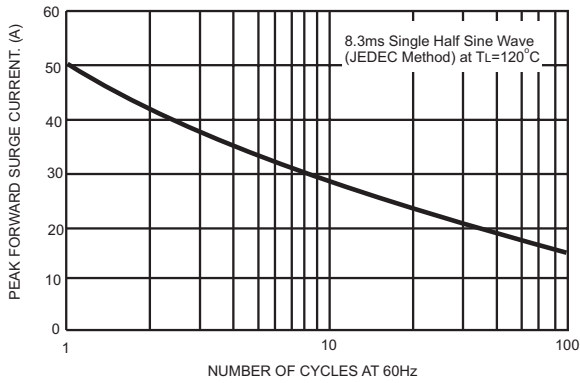


FIG.4- TYPICAL JUNCTION CAPACITANCE

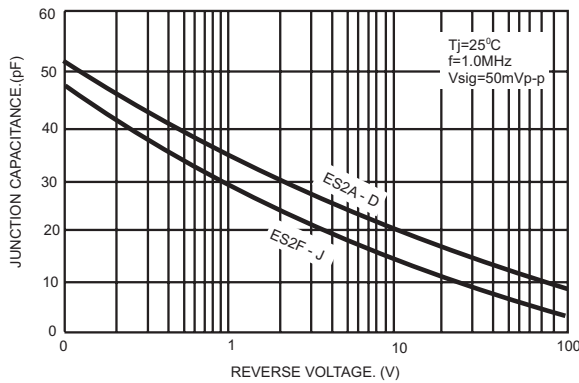


FIG.2- TYPICAL REVERSE CHARACTERISTICS

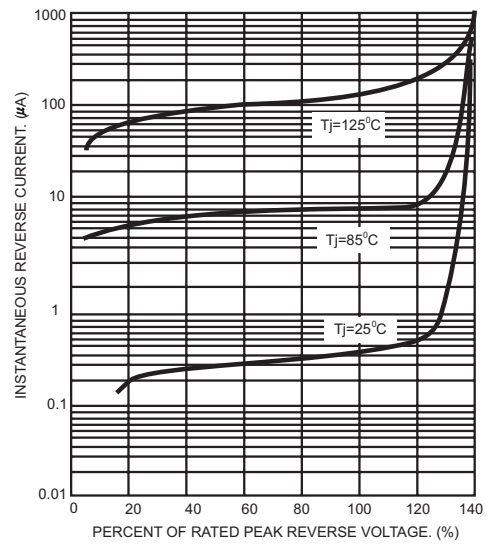


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



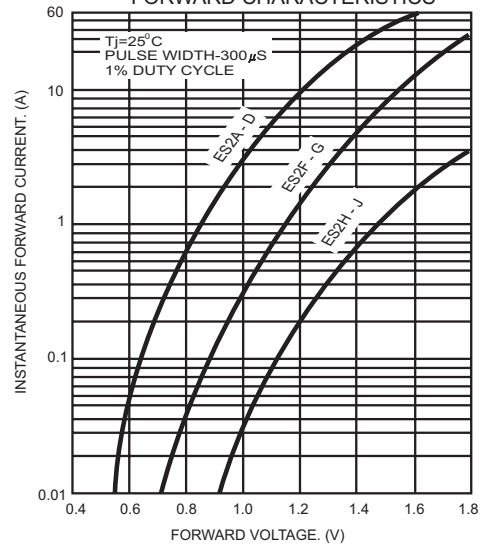



FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

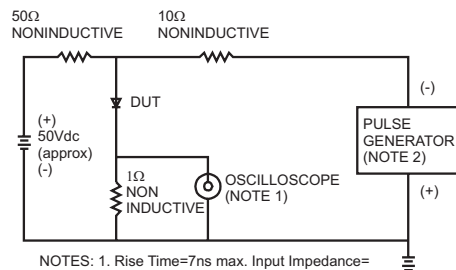

NOTES: 1. Rise Time=7ns max. Input Impedance= 1 megohm 22pf
2. Rise Time=10ns max. Source Impedance= 50 ohms

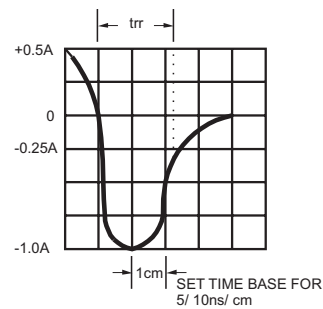

Dimensions

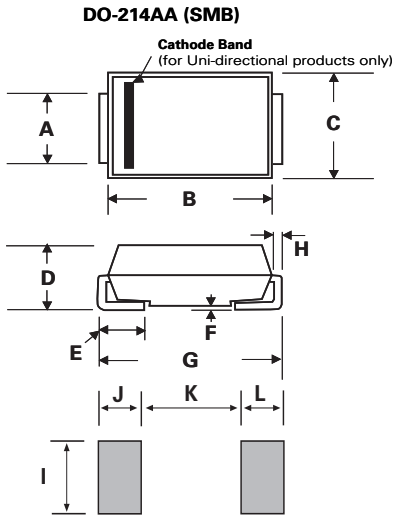


Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.066	0.091	1.700	2.300
B	0.160	0.191	4.060	4.850
C	0.130	0.155	3.300	3.940
D	0.083	0.098	2.100	2.500
E	0.030	0.060	0.760	1.520
F	-	0.011	-	0.300
G	0.200	0.220	5.08	5.590
H	0.006	0.012	0.152	0.310
I	0.082	-	2.100	-
J	0.070	-	1.800	-
K	-	0.107	-	2.740
L	0.070	-	1.800	-

Ordering information

Part number	Component Package	Quantity	Packaging Option	Packaging Specification
ES2X	DO-214AA	3000	Tape & Reel - 12mm tape/13" reel	EIA STD RS-481

Tape and Reel Specification

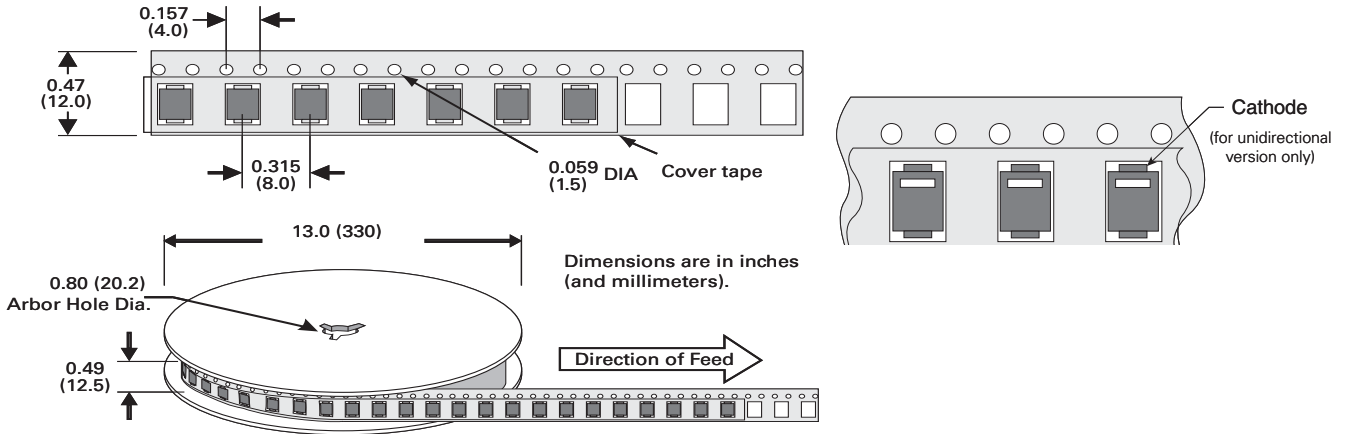

Note: Devices are packed in accordance with EIA standard RS-481-A and specification given above.